





THE UNIVERSAL SWIVEL EYE SAFETY LIFTING-CLAMP FOR LIFTING IN ANY DIRECTION

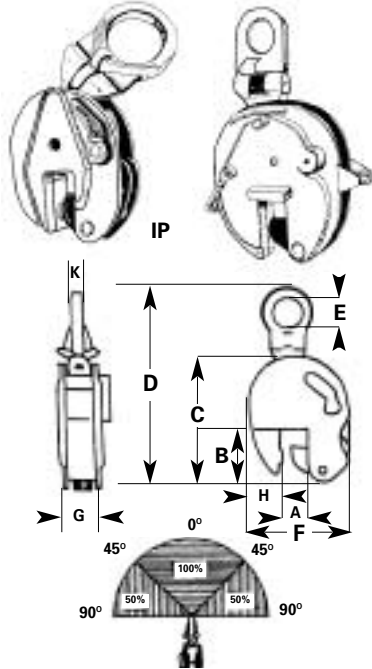

- Universal hoisting eye allows clamp to be positioned at any point on material to be vertically lifted. Excellent product to use in conjunction with multilegged rigging apparatus.
- The pulling forces exerted on hoisting eye are fully converted through the cam segment to clamping forces on the load being lifted. These clamping forces are 3 times the weight lifted. Consult crossloading diagram below.
- Reduces or eliminates the need for spreader bars.
- Our larger models have been redesigned to allow safer turning of your plates and are fitted with a special hook up that allows the crane hook to assist in easy horizontal placing of your lifting clamp by one person.
- Turns plates 180° without reduction in safe working load.
- Fitted with latch, which ensures the proper use by means of a double locking device, in open as well as closed position. This also guarantees a preload on the material to be lifted.

WORKING LOAD LIMIT* in Tons	JAW APERTURE (in.) A	DIMENSIONS IN INCHES								WEIGHT lbs. EACH
		B	C	D	E	F	G	H	K	
.75	0 - 5/8	1 3/4	5 1/16	9	1 3/16	4 9/16	1 7/16	1 1/4	3/8	4
.75	5/8 - 1 1/4	1 13/16	5 1/8	9	1 3/16	5 1/16	1 17/64	1 1/4	3/8	4
1.5	0 - 3/4	3 3/16	7 7/8	14 13/16	2 3/4	7 1/8	2 1/16	2 7/16	5/8	17
1.5	3/4 - 1 5/8	3 1/16	7 7/16	14 7/8	2 3/4	7 1/8	2 7/16	2 7/16	5/8	17
3	0 - 1	3 3/8	9 7/16	17 3/16	2 15/16	8 1/4	3 1/16	2 3/8	13/16	35
3	1 - 2	3 3/8	9 7/16	17 3/16	2 15/16	9 1/4	3 1/16	2 3/8	13/16	36
4.5	0 - 1	3 3/8	9 7/16	17 9/16	2 15/16	8 1/4	3 1/16	2 3/8	13/16	35
4.5	1 - 2	3 3/8	9 7/16	17 7/16	2 15/16	9 1/4	3 1/16	2 3/8	13/16	37
6	0 - 1 1/4	4 9/16	11 7/16	20 3/16	3 3/16	10 3/8	3 1/16	4 1/16	13/16	50
6	1 1/4 - 2 1/2	4 9/16	11 1/16	20 1/8	3 3/16	10 3/4	3 1/16	4 1/16	13/16	51
9	0 - 1 5/8	4 5/16	12 1/2	21 5/8	3 3/16	9 5/8	3 3/8	3 9/16	1	63
9	1 5/8 - 3 1/8	4 3/8	12 9/16	24 17/32	3 3/16	11 1/4	3 3/8	3 9/16	1	64
12	0 - 2 1/8	6 5/16	15 3/8	30 7/16	3 3/16	13 3/8	4 21/32	5 11/32	1	126
12	2 1/8 - 4 1/4	7	17 9/32	28 29/32	3 3/16	15 5/8	4 21/32	5 11/32	1	130
16	1/4 - 2 1/2	7 3/16	18 5/16	11 7/64	3 15/32	15 5/8	4 11/16	6 7/32	1	174
16	2 1/2 - 5	8 1/32	20 15/32	33 21/32	3 15/32	18 3/8	4 11/16	6 11/32	1	203
22.5	1/4 - 3 1/8	8 3/4	21 29/64	36 5/8	4 11/32	18 1/2	5 23/64	7 21/64	1	281
22.5	3 1/8 - 6 1/8	9 27/32	24 13/32	33 55/64	4 11/32	22 1/4	5 23/64	7 23/32	1	288
30	1/4 - 3 1/8	8 3/4	21 29/64	36 13/16	4 11/32	18 1/2	6	7 21/64	1 3/16	337
30	3 1/8 - 6 1/8	9 27/32	24 13/32	36 13/16	4 11/32	22 1/4	6	7 23/32	1 3/16	364

***WARNING :** Never exceed working load limit. Various dimensions and capacities as well as heat and chemical resistant clamps, can be delivered on demand, to specification. Specifications are subject to change without notice.



Components of swivel safety lifting clamps

- | | |
|------------------------------------|------------------------------|
| 1 body complete | 6 cam-segment shaft complete |
| 2 hoisting-eye complete | 7 hoisting-eyeshaft complete |
| 3 cam-segment complete | 10 pivot complete |
| 4 safety latch complete | 10 pivot complete (oval) |
| 5 spring for safety latch complete | |