





CHAIN FITTINGS

OVERHEAD LIFTING COMPONENTS

ALLOY SLING HOOK Clevis Type

CHAIN SIZE in.	WORKING LOAD LIMIT*		DIMENSIONS IN INCHES									
	lbs.	kgs	R	T	U	A	E	LOAD PIN DIA.	D	W	HP	OAW
9/32	3,500	1,590	3 3/4	1 1/4	1 1/16	5/16	11/32	3/8	1 1/8	3/4	1 23/32	3 7/8
3/8	7,100	3,200	4 3/4	1 9/16	1 5/16	7/16	1/2	1/2	1 7/16	15/16	2 3/8	4 1/2
1/2	12,000	5,400	5 3/4	1 7/8	1 9/16	9/16	5/8	5/8	1 7/8	1 1/4	2 11/16	6 1/8
5/8	18,100	8,200	6 3/4	2 3/16	1 13/16	23/32	3/4	3/4	2 1/8	1 1/4	3 1/8	6 15/16
3/4	28,300	12,900	7 3/4	2 1/2	2 3/16	13/16	7/8	7/8	2 7/16	1 1/2	3 3/8	7 3/4

Dimensions and weights are approximate. *WARNING: Never exceed working load limit.

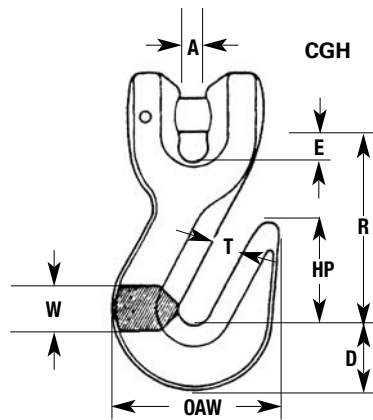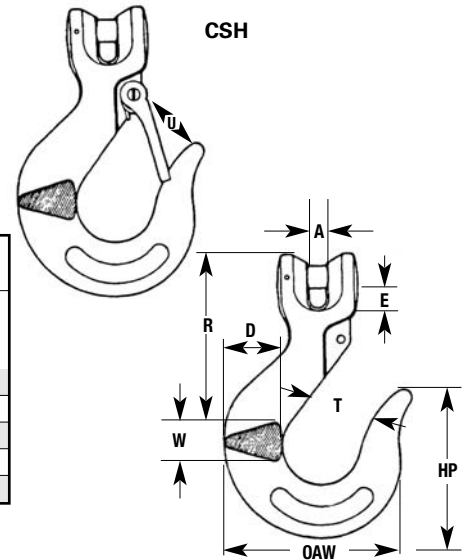

ALLOY GRAB HOOK Clevis Type

CHAIN SIZE in.	WORKING LOAD LIMIT*		DIMENSIONS IN INCHES									
	lbs.	kgs	R	T	A	E	LOAD PIN DIA.	D	W	HP	OAW	
9/32	3,500	1,590	2 11/32	3/8	5/16	11/32	3/8	13/16	5/8	1 1/4	2	
3/8	7,100	3,200	2 29/32	1/2	7/16	1/2	1/2	1 1/4	3/4	1 5/8	2 13/16	
1/2	12,000	5,400	3 23/32	21/32	9/16	5/8	5/8	1 1/2	15/16	2	3 1/2	
5/8	18,100	8,200	5 7/16	25/32	23/32	3/4	3/4	1 3/4	1 1/16	2 5/8	4 1/8	
3/4	28,300	12,900	5 5/32	15/16	13/16	7/8	7/8	2	1 1/4	3 1/8	4 15/16	

Dimensions and weights are approximate. *WARNING: Never exceed working load limit.

HAMMERLOK COUPLING LINK Clevis Type

CHAIN SIZE in.	WORKING LOAD LIMIT*		DIMENSIONS IN INCHES							
	lbs.	kgs	A	B	C	EE**	MAXIMUM WIDTH	DIA. HOLE TO ACCEPT MALE LEG	WEIGHT lbs. EACH	
7/32	2,100	950	1/4	1 13/32	31/64	13/32	1 5/16	1/2	.12	
9/32	3,500	1,590	5/16	1 13/16	5/8	1/2	1 11/16	35/64	.23	
3/8	7,100	3,200	7/16	2 13/32	53/64	3/4	2 7/32	47/64	.65	
1/2	12,000	5,400	5/8	3 3/8	1 7/32	1	3 1/8	59/64	1.50	
5/8	18,100	8,200	3/4	4 1/16	1 1/2	1 1/4	3 11/16	1 1/16	2.60	
3/4	28,300	12,900	7/8	4 25/32	1 51/64	1 1/2	4 5/16	1 1/4	3.80	
7/8	34,200	15,500	1 3/64	5 1/16	1 7/8	1 3/4	5 5/16	1 11/32	6.30	
1	47,700	21,600	1 1/4	5 3/4	2 3/16	2	6 3/16	1 9/16	9.30	
1 1/4	72,300	32,800	1 17/32	6 13/16	2 5/8	2 1/4	7 3/4	2	17.30	

Dimensions and weights are approximate. *WARNING: Never exceed working load limit.
**Diameter of stock of largest link intended to be used with hammerlock. GR 100 alloy fittings are available for special higher working load limit applications.

