




WIRE ROPE SLINGS

SWAGED BOOM PENDANTS

SLINGS WITH SINGLE-ROPE PARTS AND OPEN AND/OR CLOSED SWAGED SOCKETS.**

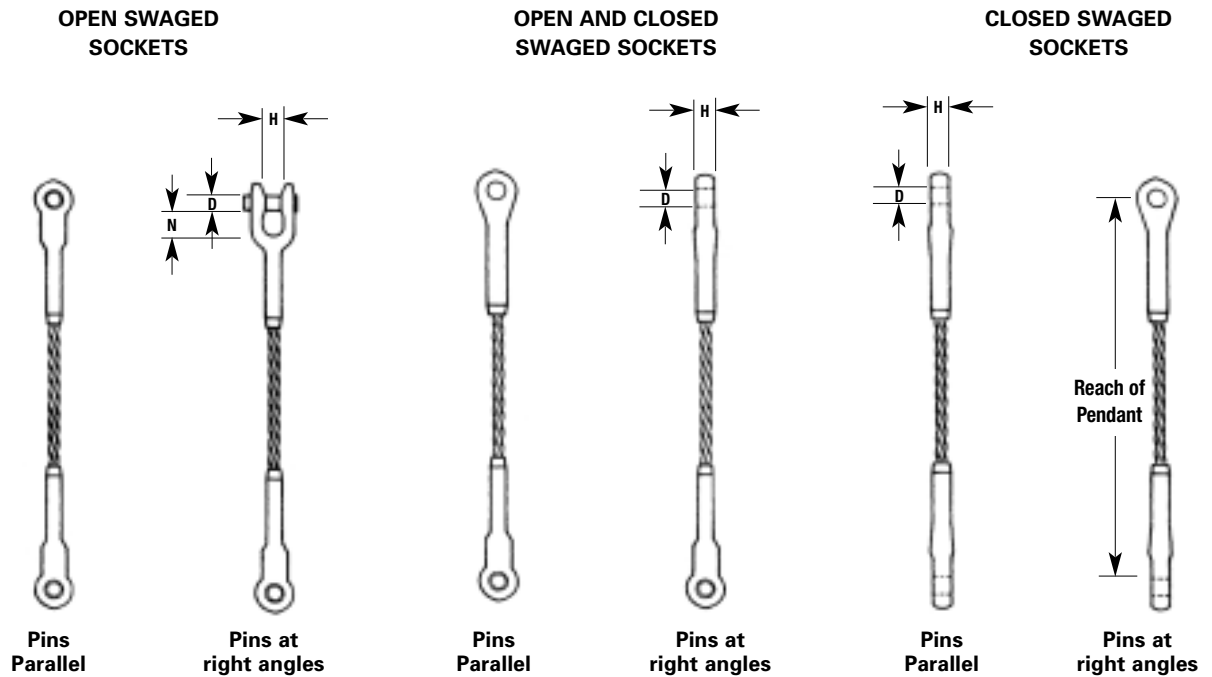

DIAMETER OF WIRE ROPE (in.)	MINIMUM REACH OF PENDANT ft./in.	WORKING LOAD LIMIT*		DIMENSIONS IN INCHES					
		VERTICAL		OPEN SWAGE SOCKET			CLOSE SWAGE SOCKET		
		Tons	metric tons	H	D	N	H	D	
1/4	0-11	.68	.62	.69	.69	1.5	.50	.75	
5/16	1-1	1.1	1	.81	.81	1.75	.67	.88	
3/8	1-3	1.5	1.4	.81	.81	1.75	.67	.88	
7/16	1-6	2.0	1.8	1	1	2	.86	1.06	
1/2	1-8	2.7	2.4	1.00	1	2	.86	1.06	
9/16	1-10	3.4	3.1	1.25	1.19	2.25	1.13	1.25	
5/8	2-0	4.1	3.7	1.25	1.19	2.25	1.13	1.25	
3/4	2-5	5.9	5.4	1.5	1.38	2.75	1.31	1.44	
7/8	2-10	8	7.3	1.75	1.62	3.25	1.5	1.69	
1	3-2	10	9.1	2	2	3.75	1.75	2.06	
1 1/8	3-7	13	12	2.25	2.25	4.25	2	2.31	
1 1/4	4-0	16	15	2.5	2.5	4.75	2.25	2.56	
1 3/8	4-5	19	17	2.5	2.5	5.25	2.25	2.56	
1 1/2	4-9	23	21	3	2.75	5.75	2.5	2.81	
1 3/4	5-5	31	28	3.5	3.5	6.75	3	3.56	
2	6-4	40	36	4	3.75	8	3.25	3.81	
2 1/4	7-2	49	44	4.25	4.25	6.75	-	-	
2 1/2	8-0	60	54	4.25	4.25	6.75	-	-	

***WARNING:** Never exceed working load limit.
All Boom Pendants must be physically proof tested as per B30.9 Specification if requested on customer contract.
**Interchangeable with Spelter Sockets with zinc or epoxy.
Design factor 5:1.
WRTB Specification using EIPS Rope.