



## UTILITY CHAIN


A complete line of utility and tie down chains in any length with any type of hook or other attachment is available. System 3 (Proof Coil) Self-colored finish - used as a general utility chain. System 4 (High Test) Bright finish - for heavy duty trucking. System 7 (Transport) Plated - for higher working load limit with lighter chain.

### TAIL CHAINS

Available for any size winch line.

### MISSING LINKS

FORGED STEEL - QUENCHED & TEMPERED

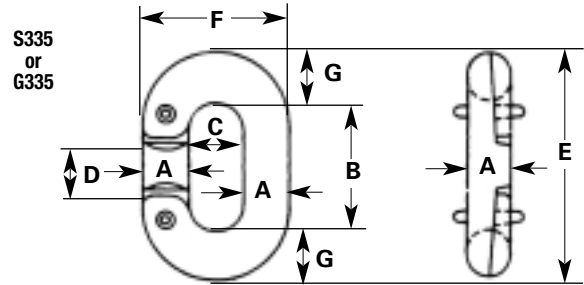


(in.) Size	A	B	C	D	E	F	G	lbs. PER 100 ft.	WORKING LOAD LIMIT*
3/16	.25	.69	.34	.34	1.19	.78	.28	2.50	800
1/4	.28	.88	.44	.44	1.50	1.00	.31	6.25	1,325
5/16	.34	.94	.47	.47	1.69	1.16	.38	12.50	1,950
3/8	.41	1.13	.56	.56	2.06	1.38	.47	20.00	2,750
7/16	.47	1.28	.59	.59	2.34	1.53	.53	27.50	3,625
1/2	.53	1.47	.66	.66	2.66	1.72	.59	37.50	4,750
5/8	.66	1.81	.78	.81	3.31	2.09	.75	72.50	7,250
3/4	.78	2.13	.94	1.06	3.88	2.50	.88	122.50	10,250
7/8	.91	2.50	1.13	1.13	4.50	2.94	1.00	175.00	12,000
1	1.03	2.75	1.25	1.25	5.00	3.31	1.13	250.00	15,500

Design factor 4:1. Not for overhead lifting.  
\*WARNING: Never exceed working load limit.

## GALVANIZED QUICK LINKS

FOR CHAIN SIZE		BREAKING STRENGTH	
in.	mm	lbs.	kgs
1/8	3.5	800	363
3/16	5	1300	590
1/4	6	2000	907
5/16	8	3200	1452
3/8	9	4000	1814
7/16	10	4800	2177
1/2	12	6000	2722

Quick



**MATERIAL:** Mild steel, zinc coated. Not for overhead lifting.

## BARREL HOOKS

Forged carbon steel.



WORKING LOAD LIMIT* Tons	WEIGHT PER PAIR (lbs.)	DIMENSIONS IN INCHES			
		I.D. OF EYE	O.D. OF EYE	OVERALL LENGTH	WIDTH OF LIP
1	3.13	1.56	2.81	5.00	2.88

\*WARNING: Never exceed working load limit.