



PLATE AND LIFTING CLAMPS


CHAIN CONNECTOR

The chain connector attaches "MK" and "GX" clamps securely to chain slings. It replaces the lifting shackle by attaching directly to the clamp's radius link. No other connectors are required. The chain connector increases the flexibility of multiple leg slings. It is made of drop forged and heat treated, alloy steel. Kit includes connector, pin and rivet. NOTE : Connector is not recommended for use with wire rope.



CAT. no.	FOR USE WITH CLAMPS	WORKING LOAD LIMIT*		ALLOY CHAIN SIZE	
		Tons	kgs	in.	mm
650-5002	55 MK	1/2	454	3/8	9
650-5004	21 MK, 22 MK	1	907	1/2	13
650-5025	GX, GXL	1/2	454	3/8	9
650-5026	GX, GXL	1	907	3/8	9
650-5027	GX, GXL	3	2700	1/2	13
650-5028	GX, GXL	5	4536	3/4	20

*WARNING : Never exceed working load limit.

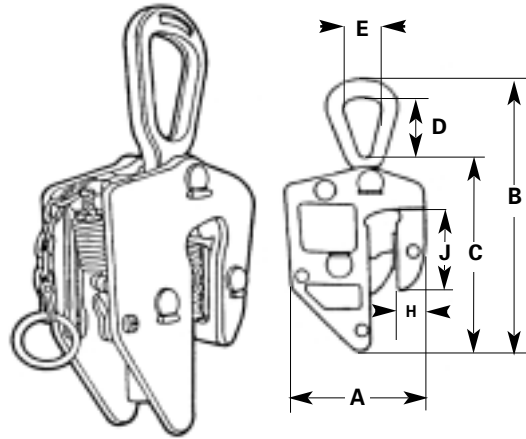

LOCKING "E" CLAMP

This clamp lifts from either horizontal or vertical positions. It locks open or closed with a lever and is available with Working Load Limits from 3 to 20 Tons. The "E" clamp has a large throat that gives a secure bite and a wide grip range. Its swivel pad rotates in its seat and permits quick release. A low cam angle and a wide cam face give increased gripping force on the plate. Grease fittings are provided for bearing lubrication. All parts are protected by the clamp body. Another feature is a large shackle opening.

MODEL NUMBER	CAT. no.	WORKING LOAD LIMIT*		GRIP RANGE		DIMENSIONS IN INCHES							WEIGHT lbs. EACH	
		Tons	kgs	in.	mm	A	B	C	D	E	H	J		THICKNESS
3E	642-0701	3	2722	0-1 1/8	0 - 32	7 1/4	13 3/4	9 1/4	3 1/2	2	2	4 3/8	2 3/8	21
5E	642-0702	5	4536	0- 1 1/2	0 - 38	8 7/8	16	10 1/2	3 1/2	2 1/2	2 11/16	5	3 1/4	24
5E	642-0703	5	4536	1 1/4 - 2 1/2	32 - 64	10 1/2	16 5/8	11 1/4	3 1/2	2 1/2	3 1/8	5 1/4	3 1/2	33
8E	642-0705	8	7258	1/2 - 2 1/2	13 - 64	14 1/8	22 3/4	15 3/4	5	3 1/2	4 7/8	8 1/2	4 7/8	78
8E	642-0706	8	7258	2 - 4	51 - 102	16	23	16 1/4	5	3 1/2	5 1/16	8 3/4	4 3/4	84
8E	642-0707	8	7258	4 - 6	102 - 152	18	25 3/4	18 7/8	5	3 1/2	5 1/4	10 1/4	4 3/4	110
12E	642-0708	12	10886	1/2 - 2 1/2	13 - 64	14 1/4	22 3/4	16	5	3 1/2	4 7/8	8 1/2	4 3/4	78
12E	642-0709	12	10886	2 - 4	51 - 102	16 1/4	23	16 1/4	5	3 1/2	5 1/2	8 3/4	4 3/4	98
12E	642-0710	12	10886	4 - 6	102 - 152	18 1/2	26	19	5	3 1/2	5 7/16	10 1/4	4 3/4	117
20E	642-0711	20	18144	1/2 - 3	13 - 76	16 1/2	25 1/4	17 1/4	5	3 1/2	6 1/2	8 1/2	5 1/4	139
20E	642-0712	20	18144	3 - 5 1/2	76 - 140	19 1/2	26 3/8	18 1/4	5	3 1/2	6 1/2	9 3/4	5 1/4	168
20E	642-0713	20	18144	5 1/2 - 8	140 - 203	21 1/2	26 1/4	18 1/4	5	3 1/2	6 1/2	9 3/4	5 1/4	189

WARNING : Be sure clamp is in lock closed position before making lift.

*Never exceed working load limit.