



BISON INDUSTRIES INC.
A HERCULES CO.
www.bisonindustries.com


HOISTS AND PULLERS

SERIES 632 TROLLEY

This trolley features Dial –Fit collars made of die-cast aluminum and is adaptable to a wide range of I-beam sizes. Made of hi-quality rolled steel, the 632 trolley can negotiate radius curves as tight as 7 to 10 inches depending upon capacity.

MAXIMUM CAPACITY* Tons	ADJUST FOR STANDARD I-BEAM DEPTH in.	TREAD DIAMETER OF WHEELS (in.)	WEIGHT lbs. EACH	APPROXIMATE SHIPPING WEIGHT lbs.
1/2	4-12	2 3/4	11	12
1	4-12	2 3/4	12	13
1-1/2	6-15	3 3/8	25	28
2	6-15	3 3/8	25	28

*WARNING : Never exceed maximum capacity

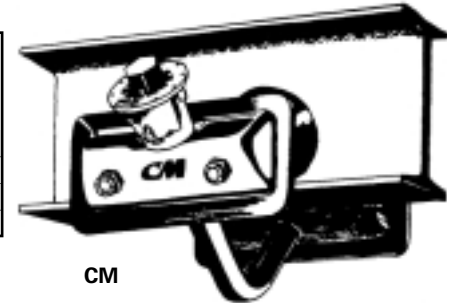


CM

SERIES 639 ROLLER BEARING TROLLEY

Designed to handle heavy-duty applications. Wheels are made of long-wearing gray iron with hardened treads. Side frames are extra-heavy rolled steel and self-align to distribute load on all four wheels. Series 639 will operate on sloped or flat Flanged beams, rails or tracks.



PLAIN



GEARED

MAXIMUM CAPACITY* Tons	ADJUST FOR STANDARD I-BEAM DEPTH in.	TREAD DIAMETER OF WHEELS (in.)	HAND CHAIN DROP BELOW BEAM GEARED (ft.)	WEIGHT lbs. EACH PLAIN	WEIGHT lbs. EACH GEARED
1/2	5-10	3 1/2	-	32	-
1	5-10	3 1/2	8	32	68
1 1/2	6-10	4	8	52	28
2	6-10	4	8	52	28
3	8-15	5	8	88	111
4	8-15	5	8	88	111
5	10-18	6	8	137	168
6	10-18	6	8	137	168
8	12-24	8	9	279	362
10	12-24	8	9	279	362


*WARNING : Never exceed maximum capacity

SAMSON TROLLEY

The Samson Trolley is an economical all purpose trolley for use with any hook suspended hoist or puller. It has ball bearings for smooth operation and is easily adjustable for a wide range of beams.

MAXIMUM CAPACITY* Tons	ADJUST FOR STANDARD I-BEAM		TREAD DIAMETER OF WHEELS (in.)	WEIGHT lbs. EACH
	DEPTH in.	FLANGE WIDTH in.		
1/2	3-15	2 1/2 - 5 5/8	2 9/32	17
1	5-24	3-8	3 15/32	35
2	6-24	3 5/8 - 8	3 15/16	53
3	8-24	4-8	5 1/8	101
5	10-24	4 5/8 - 8	6 1/8	145

*WARNING : Never exceed maximum capacity

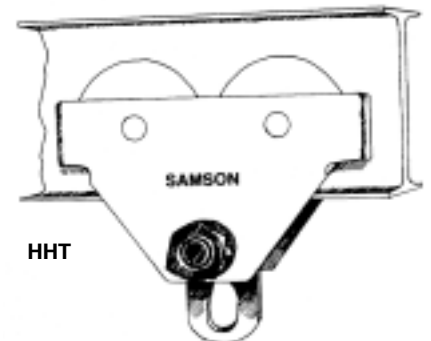

HHT